


编号	修改记录
00	新开发
01	改逻辑
02	改图案, 改逻辑

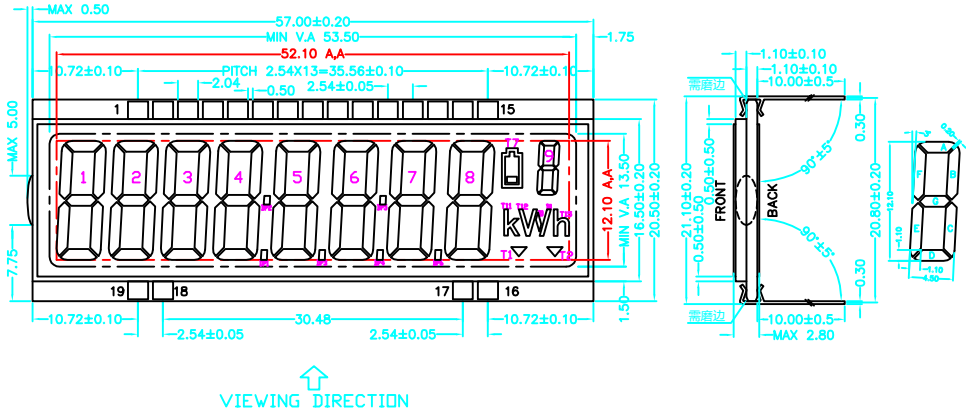


Multisight Display Co., Ltd.

1. DRIVING VOLTAGE: 3.3V, 1/6DUTY, 1/3BIAS	6. FRONT POLARIZER: TRANSMISSIVE
2. STORAGE TEMPERATURE: -50 °C TO 90 °C	7. BACK POLARIZER: REFLECTIVE
3. OPERATING TEMPERATURE: -40 °C TO 80 °C	8. CONNECTORS: PIN
4. VIEWING DIRECTION: 6 O'CLOCK	9. SCREEN PRINTING: NIL
5. DISPLAY MODE: HTN POSITIVE	10. REMARKS:

MODEL No.: M52168	VER: 02	UNIT	MILLIMETRE
DESIGNER HXY	DATE 2024-10-04	PAGE	1 OF 3
CHECKED RBT	DATE 2024-10-04		
APPROVED JOAN	DATE 2024-10-04		

编号	修改记录
00	新开发
01	改逻辑
02	改图案, 改逻辑

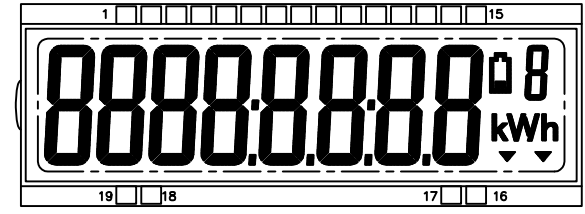


显示效果图

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
COM1	COM1	---	---	---	---	---	1A	2F	2G	2E	1F	1G	1E	T2	T15	T13	T11	---	9B
COM2	---	COM2	---	---	---	---	2A	2B	2C	2D	1B	1C	1D	DP4	T14	T12	T1	9C	9G
COM3	---	---	COM3	---	---	---	3D	DP1	4D	DP2	5D	DP3	6D	DP5	7D	DP6	8D	T7	9D
COM4	---	---	---	COM4	---	---	3E	3C	4E	4C	5E	5C	6E	6C	7E	7C	8E	8C	9E
COM5	---	---	---	---	COM5	---	3F	3G	4F	4G	5F	5G	6F	6G	7F	7G	8F	8G	9F
COM6	---	---	---	---	---	COM6	3A	3B	4A	4B	5A	5B	6A	6B	7A	7B	8A	8B	9A

Multisight Display Co., Ltd.

MODEL No.: M52168	VER: 02	UNIT	MILLIMETRE
DESIGNER HXY	DATE 2024-10-04	PAGE	2 OF 3
CHECKED RBT	DATE 2024-10-04		
APPROVED JOAN	DATE 2024-10-04		

编号	修改记录
00	新开发
01	改逻辑
02	改图案, 改逻辑

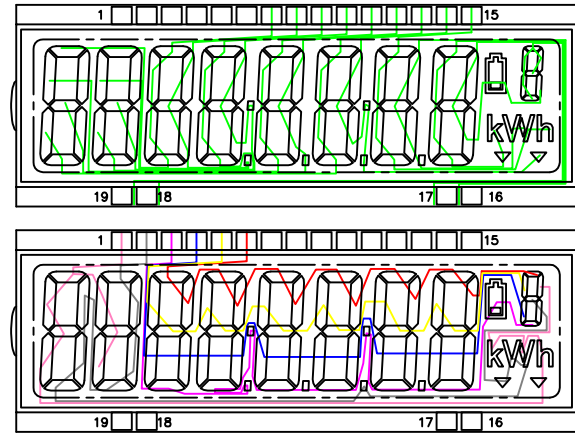

SEG

COM

此图面仅供参考走线

Multisight Display Co., Ltd.

MODEL No.: M52168	VER: 02	UNIT	MILLIMETRE
DESIGNER HXY	DATE 2024-10-04	PAGE	3 OF 3
CHECKED RBT	DATE 2024-10-04		
APPROVED JOAN	DATE 2024-10-04		

